

Touchscreen internet bank payment kiosk with metal keyboard, dip card reader and thermal printer




Applications

- Internet browsing
- Receipt printing
- Credit card payment
- Music vending
- Information ads

Features

1. Powerful up-to-date CPU;
2. Waterproof SAW touchscreen;
3. CUSTOM brand printer with original protection mouth;
4. Cherry key switch mechanic metal keyboard;
5. All in one media card and BT reader;
6. All steel sleek anti graffiti enclosure

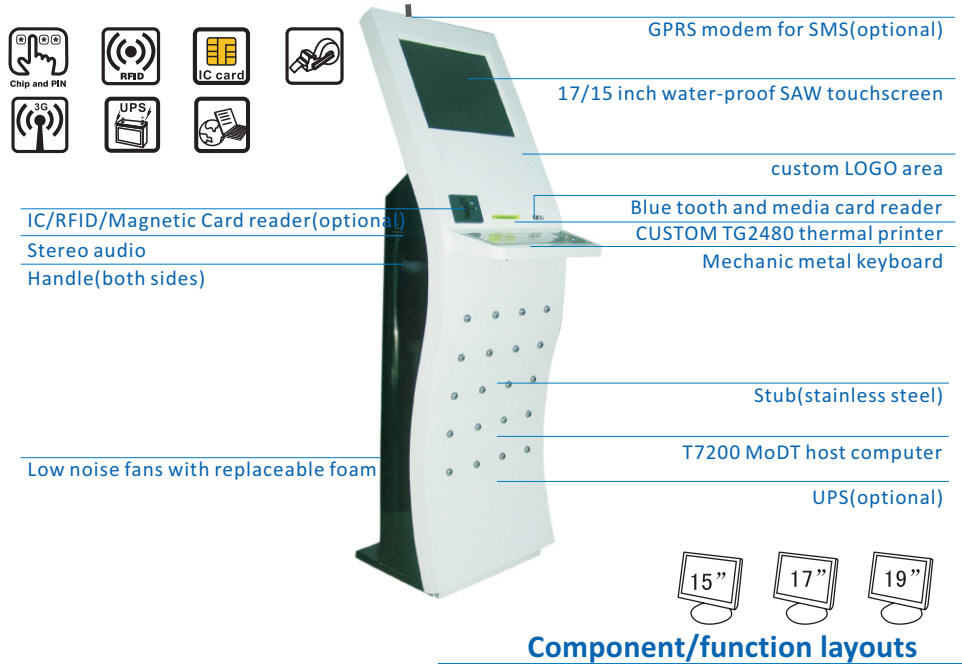

Specifications

Model Name	H1B-17M-TG	H1B-15E
Processor	3.0GHz Intel® Core™ i5 2320	3.0GHz Intel® Pentium™ E6600(fan)
RAM	4Gb DDR II(16G max)	2Gb DDR II(4G max)
HDD	60G SSD or 500G 7200rpm 3.5" hard driver Up to 3TB size	
Monitor	17" LCD with DX9 decoding acceleration	15" LCD with DX9 decoding acceleration
Touchscreen	Water proof SAW touchscreen with function keys	
RFID reader	R3 mifare RFID reader	(None)
Ticket printer	CUSTOM®(Italy brand) TG2480 thermal printer, thickness:80-120g/m2(optional)	
Metal keyboard	Mechanic metal keyboard with trackball(Cherry keyswitch)	
Media storage card reader	(None)	All in one media storage card reader
Blue tooth reader	(None)	Blue tooth reader
Credit/Debit card R'	Rd2 Dip card reader(optional)	
Barcode reader	HONEYWELL® 4823F 1D Laser Reader	(None)
GPRS Modem	Simemse MC55 GPRS dual band SMS modem	
UPS	SANTAK K500 PRO UPS for at least 5 mins of power	
Audio	Bi-stereo channel 2X5W speakers	
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Security lock with crossbars Moistureproof,Antirust,Anti-acid,Static free Dimensions: 45-56cm * 45-56cm * 152-183cm	
Rear I/O Connectors	Power Jack Fuse(3A) Main power switch Host PC Power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45	
Fans	110 or 220 V AC selective Operation noise level: <45dB	
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A	
Operating System	XP, WIN 7, WinCE, XPe, WES, Linux2.6, Ubuntu9, Fedora10	
Operating Temperature	0°C up to 45°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

