

# Multitouch wall mounted digital signage kiosk with barcode reader


## Component/function layouts

## Wall mounted kiosk J5



17"/19"/22"/24"/32"/42"/46"/55"/65"/70" FULL HD multi-touch touchable IPS main monitor

Barcode reader(optional)

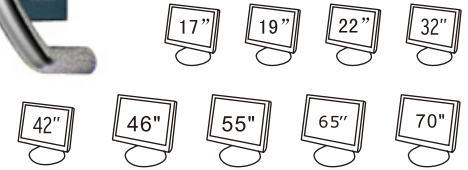

### Applications

- Advertisement kiosk
- Hotel kiosk
- Exhibition kiosk
- Apps store
- Presentation
- Information kiosk

### Features

- Dual Core Intel Core i3 MoDT;
- Full HD LCD;
- Full view angle IPS display;
- Multi touch support
- Integrated optional barcode reader
- All steel anti-graffiti enclosure

### Specifications

Part Name	J1A42BC	J1A32BC
Processor	Intel Core i3 3217	Intel Core i3 3217
RAM	4Gb DDR III(16G max)	4Gb DDR III(16G max)
HDD	60G SSD or 500G 7200rpm 3.5" hard driver Up to 3TB size	
Display	42" LCD display with LED backlight	32" LCD display with LED backlight
Touchscreen	42" waterproof multitouch touchscreen	32" waterproof multitouch touchscreen
Barcode reader(optional)	MD60 2D barcode reader	MD60 2D barcode reader
Camera	720P surveillance camera	720P surveillance camera
Rear I/O Connectors	Power Jack Fuse(3A) Power switch Host computer Power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45	
Fans	110 or 220 V AC selective Operation noise level: <45dB	
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A	
Operating System	WINDOWS XP/7/8/Linux 2.6 distribution(i.e. Fedora 9, CentOS 5, Ubuntu 10 and SUSE etc)	
Operating Temperature	0°C up to 45°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

