


Touchscreen internet bank queue kiosk with swipe and NFC card reader and thermal printer

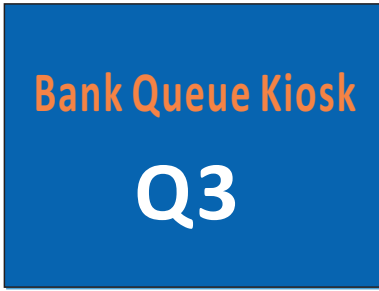

Applications

- Internet browsing
- Receipt printing
- Telecom bill collection
- Information ads
- 1D barcode

Features

1. Mobile CPU system(Mobile on Desktop - MoDT) technology;
2. Waterproof IR/SAW touchscreen;
3. High speed printer with original printer head;
4. NFC card reader
5. All steel sleek anti graffiti enclosure



- GPRS modem for SMS(optional)
- 17/15 inch water-proof IR/SAW touchscreen
- Swipe magnetic card reader
- ZKTEK P58C mini thermal printer
- IC NFC Card reader(optional)
- Stereo audio
- Handle(both sides)
- Low noise fans with replaceable foam
- Anti-statistic surface
- VIA fanless MoDT host computer
- UPS(optional)



Component/function layouts

Specifications

Model Name	Q3-17M-P58	Q3-15E
Processor	VIA CIII 1.0G	VIA CIII 1.0G
RAM	1Gb DDR II(max)	
HDD	20G SSD or 500G 7200rpm 3.5" hard driver Up to 3TB size	
Monitor	17" LCD with DX9 decoding acceleration	15" LCD with DX9 decoding acceleration
Touchscreen	Water proof IR or SAW touchscreen	
RFID reader	ZKTEK R3	
Ticket printer	ZKTEK P58C thermal printer, thickness:80-110g/m2(optional)	
Credit/Debit card R'	ZKTEK R1	
EPP metal keypad(optional)		
Barcode reader	HONEYWELL® 4823F 1D Laser Reader optional	
GPRS Modem	Simemse MC55 GPRS dual band SMS modem	
UPS	SANTAK K500 PRO UPS for at least 5 mins of power	
Audio	Bi-stereo channel 2X10W speakers	
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Security lock with crossbars Moistureproof,Antirust,Anti-acid,Static free Dimensions: 43-50cm*52-60cm*152-165cm(varable as per monitor and configurations)	
Rear I/O Connectors	Power Jack Fuse(3A) Power switch Host power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45	
Fans	110 or 220 V AC selective Operation noise level: <45dB	
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A	
Operating System	XP, WIN 7, WinCE, XPe, WES, Linux2.6, Ubuntu9, Fedora10	
Operating Temperature	0°C up to 50°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

