

12V DC sleek kiosk system with industrial computer




Applications

- Internet kiosk
- Information kiosk
- Queue kiosk
- Map kiosk

Features

1. Waterproof SAW touchscreen;
2. Mobile on Desktop(MoDT) industrial computer(IPC)
3. All steel anti graffiti enclosure
4. 12V DC single power supply

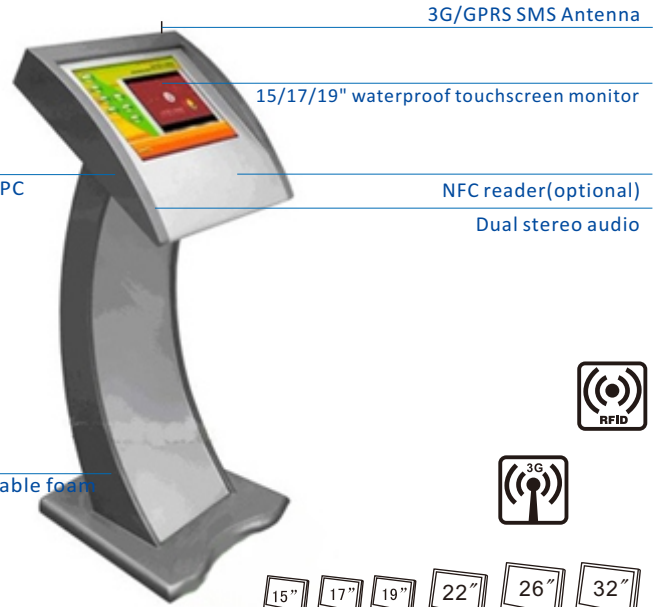

Component/function layouts

Specifications

Model Name	T2A-17W	T2C-17E
Processor	Intel® Core™ Celeron 1037 CPU(fan)	Intel® Core™ 2 i3 2100(fan)
Chipset	Intel® NM70	Intel® HM77
RAM	8Gb DDR III(max)	8Gb DDR III(max)
HDD	60G~3000G hard driver Up to 3TB size	Intel 330 series 80G 2.5" SSD(MLC) Up to 3TB size
Monitor	LCD with DX9-11 decoding acceleration	LCD with DX9-11 decoding acceleration
Touchscreen	Water proof SAW/IR touchscreen	
3G/GPRS Modem(optional)	Simense MC55 GPRS dual band SMS modem	
NFC reader(optional)	Mifare contactless card reader	
Audio	Bi-stereo channel 2X5W speakers	
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate Security lock Moistureproof,Antirust,Anti-acid,Static free Dimensions: (package)tdb	
Rear I/O Connectors	Power Jack Fuse(5A) Power switch	
Power consumption	12V DC single or 110V AC power supply(with fans) 5A	
Operating System	XP, WIN 7, WIN8, WinCE, XPe, WES, Linux2.6, Ubuntu9, Fedora10	
Operating Temperature	0°C up to 50°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

