

Payment Kiosk with cash&coin mechanism, 2D barcode reader, A4 laser and thermal printer

Payment Kiosk T5F

Applications

- Payment accepting
- Billing
- Ticketing vending
- Barcode coupon selling


Features

1. Waterproof CA/IR/SAW touchscreen;
2. Cash acceptor&coin mechanism
3. A4 laser printer
4. Mobile on Desktop(MoDT) industrial computer
5. 2D barcode scanner
6. All steel anti graffiti enclosure



Thermal printer
Coin mechanism
2D Laser barcode scanner
UPS(internal)
Mobile on Desktop(MoDT) IPC
Low noise fans with replaceable foam

3G/GPRS SMS Antenna
LOGO&Light box
PIN hole camera
Dual stereo audio
15/17/19 inch water-proof touchscreen

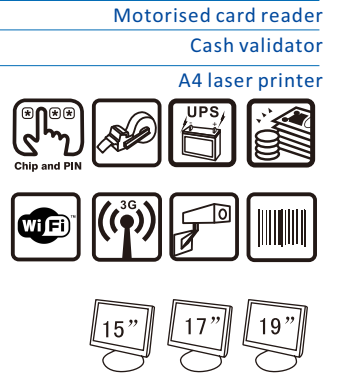

Component/function layouts

Specifications

Model Name	T5F-15RO	T5B-17C
Processor	Intel® Pentium G3420T(fan)	Intel® Core™ 2 i3 2100(fan)
Chipset	Intel® H81	Intel® B75M
RAM	4Gb DDR III(16Gmax)	4Gb DDR III(max)
HDD	5000G 7200rpm 3.5" hard driver Up to 3TB size	Intel 330 series 80G 2.5" SSD(MLC) Up to 3TB size
Monitor	15" LCD with DX11 decoding acceleration	17" LCD with DX9 decoding acceleration
Touchscreen	Water proof CA/IR/SAW touchscreen with function keys	
Light Box	Acrylic cover with light tube inside	
Receipt/Ticket printer	ZEBRA KR203	STAR 912 9 pin dot-matrix printer
Cash validation(option)	MEI® SCL83 cash validator	(None)
Coin mechanism	NRI C2 coin recycler mechanism	(None)
A4 laser printer	HP LaserJet 1008/1108/1102	SAMSUNG ML2165 laser printer
Motorised card reader	ACT A6(optional) hybrid card reader	
Telephone&POS(Add-on)	Rugged VoIP phone(Optional)	POS NEWPOS8112(Optional)
EPP metal keypad	MKP2920SEA 3DES EPP(optional)	
Barcode reader	HONEYWELL® N5680 2D Laser Reader (None)	
3G Modem	HUAWEI Em770 3G module(optional)	
UPS	SANTAK K500 PRO UPS for at least 5 mins of power	
Audio	Bi-stereo channel 2X15W speakers with amplifier&tuner	
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Security lock with crossbars Moistureproof,Antirust,Anti-acid,Static free Dimensions: (package)680*750*2030mm; (machine)590x650x1730/1850mm	
Rear I/O Connectors	Power Jack Fuse(5A) Power switch 1 COM 2 USB2.0 1 GbE LAN RJ45	
Fans	110 or 220 V AC selective Operation noise level: <45dB	
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 5A	
Operating System	XP, WIN 7, Android, WinCE, XPe, WES, Linux2.6, Ubuntu9, Fedora10	
Operating Temperature	0°C up to 50°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

